



Introducing the ONLY fire extinguisher built for ADA compliance.

The Problem: ADA guidelines require that fire extinguishers be mounted 48" or less above the floor and project 4" or less into an aisle or walkway. When a conventional round fire extinguisher is installed at the required height, it projects more than 4" into the aisle. The installation cannot comply with ADA requirements.

The Solution: Oval Fire Products is proud to introduce the first and only fire extinguisher built for ADA compliance. By flattening the tank into an oval shape, Oval has created a fire extinguisher that projects less than 4" from the wall. The fire extinguisher can be mounted at the required height and still keep aisles clear.

In addition to ADA guidelines, many other codes and standards – including OSHA regulations, NFPA standards and the International Fire Code – mandate the maximum mounting height and projection of fire extinguishers. Oval fire extinguishers facilitate compliance with all of these codes and standards. Please refer to the Oval Code Compliance Reference Sheet for complete information.

Oval fire extinguishers are patented and UL-listed. They have been thoroughly tested to assure superior performance and durability. Every fire extinguisher is rigorously tested prior to shipment.

US Patents: 9,364,696; D760,443; D760,444; D777,566

For more information and a free demonstration, contact your local fire equipment distributor, industrial supply distributor or visit ovalfireproducts.com.





Oval fire extinguishers may be either mounted on a wall or column or installed in a fire extinguisher cabinet. In either case, the installation facilitates ADA compliance.

Surface Mounting Surface mounted fire extinguishers are furnished with a patented swivel mounting hook for exposed mounting on a wall or column. The fire extinguisher projects 3 1/2" from the wall surface. The unique swivel hook assures that, if the fire extinguisher is accidentally bumped or hit, it will swivel out of the way rather than be damaged or dislodged from the wall or column.


Model	Description	Rating
10HABC	10 lb ABC Dry Chemical	4-A-80-B:C
10HPKP	10 lb Purple K Dry Chemical	80-B:C



Cabinet Mounting Fire extinguishers may also be installed in a recessed cabinet (supplied separately). Fire extinguishers for cabinet mounting are 3" deep.

Oval recessed cabinets fit into 2 1/2" and 3 5/8" stud walls and 6" masonry walls. Oval fire-rated cabinets fit into 3 5/8" stud walls. With Oval fire extinguishers and cabinets, it is no longer necessary to build an extra deep wall just for the fire extinguisher.

Model	Description	Rating
10JABC	10 lb ABC Dry Chemical	4-A-80-B:C

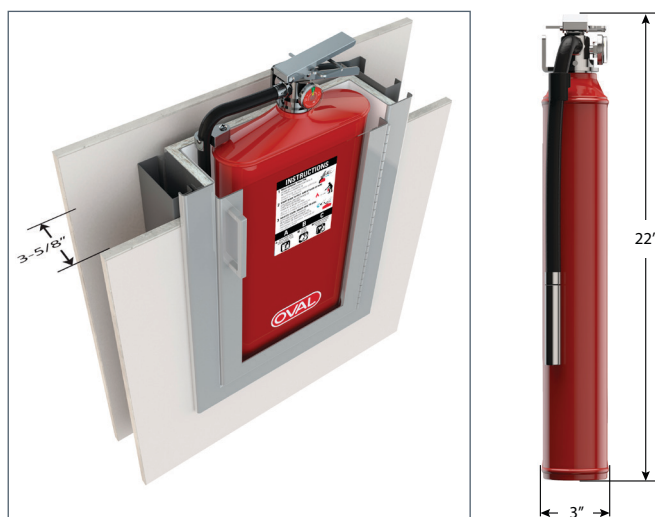

US Patents: 9,364,696; D760,443; D760,444; D777,566

Note: Oval Brand fire extinguishers are designed to facilitate compliance with ADA and other limits for protrusion of objects mounted at aisles, walkways and other circulation paths. Like all fire extinguishers, Oval products require grasping, more than 5 lbs force to actuate and two hands to operate.

